


Mini Soundproof Booth




Internal in grey fabric

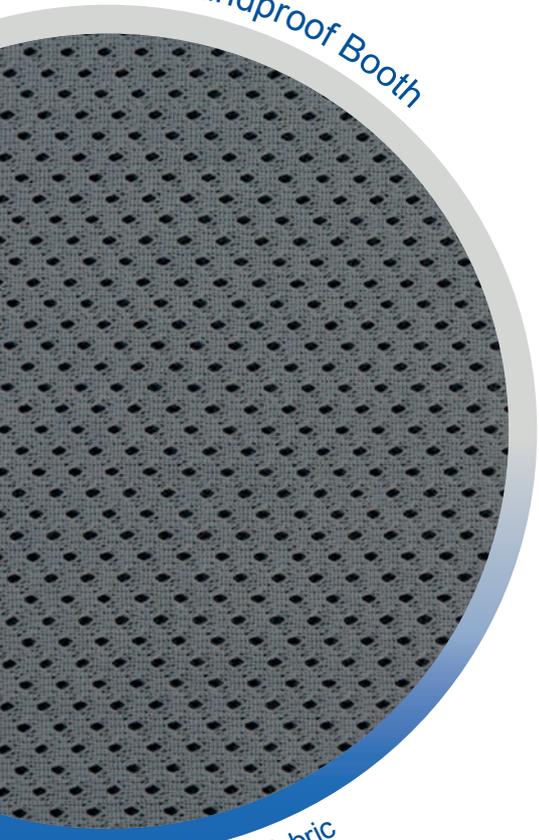

All our cabins offer the best of Italian design

- Complies with ISO 8253 1:2010\*
- New elegant design in a lightweight compact solution
- Higher soundproofing performance
- Installation in a few minutes
- Available on wheels
- Ventilation system

Configuration PRO28F

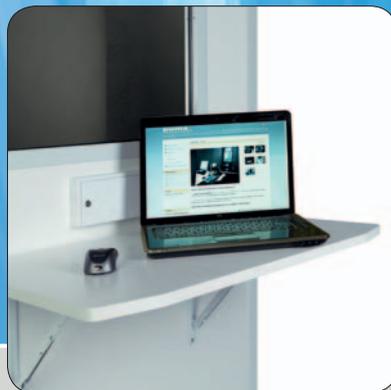

Folding table and connecting



Configuration PRO28F SLIM



Product conforms with directive EEC/93/42 regarding class I medical devices

## Technical specification

### Available sizes

Code	Outside Dimensions (LxWxH)	Inside Dimensions (LxWxH)	Ext. sq.m	Weight
P28F	96 x 96 x 197 cm	81 x 81 x 173.5 cm	0.92	233 Kg
P28FSLIM	96 x 74 x 208 cm	81 x 60 x 180 cm	0.71	185 Kg

PRO28F SLIM has been designed to pass through standard doors with a width of 830 mm. Equipped with 4 castors (2 with brake) which allow anyone to move it easily.

### Applications

PRO28F line is an excellent noise reduction booth, is recommended for hearing screening and diagnostic tests in audiology centers and shops for those who have limited space available and need a very small soundproof booth.

These booths can be also used in temporary situations for occupational medicine, in companies and schools.

### Exterior

The exterior finishing is made of a white, highly-resistant, fireproof, washable panel.

### Interior

The interior finishing is made of a special soundproof fiber covered with a new elegant, fireproof, washable and very resistant fabric for a perfect acoustics.

### Door

The door is reversible with magnetic closing. The opening (right or left) can be decided upon assembling the booth and changed in 5 minutes.

Clear opening 55 x 168 cm (w x h).

### Window

The window consists of a special double safety glass. Clear view 56x56 cm (w x h).



### Floor

The floor is layered with different materials and it stands on anti-vibration adjustable feet. Finishing: technical, antistatic, fireproof, washable carpet.

### Ventilation system

Air ventilation is included and guaranteed by a silent forced ventilation system (not available on PRO28F SLIM).

### Connecting instruments

Cables are laid through a new universal soundproof panel without jack connection. All kinds of cables can be used without the need to be cut. Adaptable to all types of instruments. Hangers for earphones are included.

### Electrical system

Lighting is ensured by a lamp with low energy consumption.  
Power supply: 230 V. 50-60 Hz.

**Noise reduction** PRO28F line is tested at the Technical-Physics Laboratory C.S.I. S.p.A. (Milano-Italy) accredited by ACCREDIA. \*Product conforms with international UNI EN ISO 8253 1:2010 with a background noise no greater than 65dB (at 500Hz) assuming a noise barrier headset (audiocups) is used.

### Acoustic insulation

Hertz	125	250	500	1000	2000	3150	4000	6300	8000
dB	21.7	25.6	32.6	36.2	34.0	37.7	41.1	41.6	43.0

### Optional Equipment

- External folding table (79 x 50 cm)
- Internal folding table (79 x 32 cm)
- Audiocups
- Kit 10 or 6 jack cable extensions
- Jack panel (10 jack + USB)
- Modification Voltage 110 V.
- Vertical window strip (16 x 115 cm)
- Wall audiometer support
- Internal seat
- Kit 4 castors (2 with brake)

### Installation

Easy and quick to install; no specialized staff required. Just follow the instructions. Thanks to reduced weight and small size can be easily set up in 5 minutes and transported in a Station Wagon car.

### Notes

The materials are fireproof at the origin. Specifications are subject to change without notice.  
Warranty: limited to one year from delivery date.

### Packaging

Delivered for shipping in a ISPM wooden case with DIY kit

### Standards

Medical Device Class I - MDD 93/42/CEE  
2007/47/CE - CEI 64/11  
CEI 64/8 - 2006/95/CE  
UNI EN ISO 8253 1:2010.

